

Features

- Fully Concealed when not in use
- Suitable for all kinds of false ceiling
- Compact, Light weight and Beautiful Finishing
- Ease of installation
- Adjustable setting kit desired up/down position
- Adjustable screen position horizontally
- All screens are supplied with black borders.
- Every screen is supplied with remote control, electronic screen control and universal brackets.
- Conceal mounting only, trap door option not available.



Model	Diagonal	Viewing Area	
<u>1:1 Format</u>			
CMS-L3030SL1 (or) CMS-L3030SL2	-	120" x 120"	3050 x 3050mm
CMS-L3636SL1(or) CMS-L3636SL2	-	144" x 144"	3660 x 3660mm
CMS-L3939J (or) CMS-L3939SL2	-	154" x 154"	3900 x 3900mm
CMS-L4040J (or) CMS-L4040SL2	-	158" x 158"	4000 x 4000mm
<u>4:3 Format</u>			
CMS-3023V/SL1 (or) CMS-L3023V/SL2	146"	117" x 88"	2970 x 2230mm
CMS-4030V/SL1 (or) CMS-L4030V/SL2	193"	154" x 116"	3920 x 2940mm

***** For other screen sizes, please call for consultation.**

Specifications

Motor Type :	AC Tubular Motor; Silent Type
Motor Speed :	17 rpm
Operating :	120 deg. Celsius (thermostat cut off motor)
Fabric Roll Speed :	4.8 m/min
Screen Gain :	1.2
Viewing Angle :	160 degrees viewing cone
Screen Materials :	Matte White with fibreglass coating, Flame Retardant and fungus resistant
External Wired Control:	Normally open, momentary contact closure (voltage free)
IR Remote Sensitivity Distance :	Maximum 15 metres
Sensor Coverage :	160 deg. (horizontal) 150deg. (vertical)
Power Consumption :	121W
Current :	1.2 or 0.64 Amperes
Voltage :	100 - 120 VAC or 220 - 240 VAC, 50/60 Hz

Accessories



Electronic Screen Control



AVA-300




1 channel Infrared Remote control



AVA-315

Radio Frequency Remote control

Dimensions

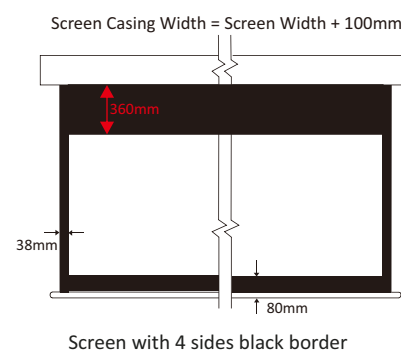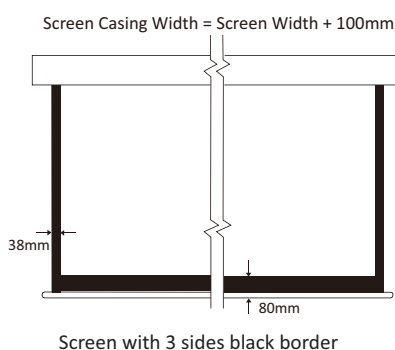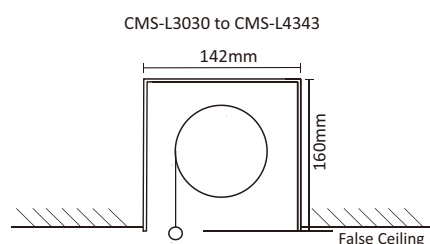

* For details dimension ,
please refer to technical specifications at
www.remacotech.com