

# Installation Guide / Manual (AVA-301-IR)

AVA



CE FC

All controls support 230V/50Hz

## AVA-301 2-Channel Infrared Remote Control




Description	AVA-301-IR
Input Voltage	3V (CR2032)
Emission Frequency	38KHz
Emission Power	3milliwatt
Work Temperature	-20°C - 70°C
Emission Distance	7m on normal condition

**Notice:** The IR remote should not expose to moisture to prolong life span of battery. We recommend to replace with same type of battery as not to affect distance sensitivity performance of remote control. Remaco is environmental-friendly company, we strongly encourage dispose battery in recycling centre.

### OPTION

## AVA-300 compatible with Electronic Screen Control (ESC+)

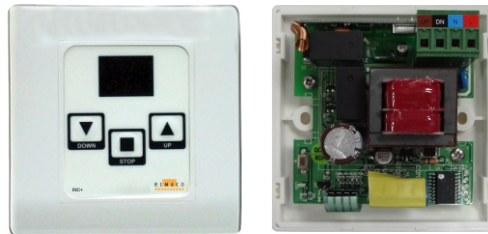

**AVA-ESC+  
Electronic Screen Control**

